IC card connectors SCN-1308 / -1608 type

1/3

||Features

- ◆Conforms to ISO-7816.
- Provision for suction space allows for automatic mounting.
- Can be supplied in embossed taping for automatic mounting.
- ◆Long life of 300,000 cycles.
- ◆A detection switch is the high reliability by self cleaning structure.



Actual size

Applications


- >Electronic accounting system terminals (electronic purse, outstanding balance indicator, etc.)
- Network computers, mobile communications terminals, POS terminals, etc.

Products Line

| No | Products No | No. of contacts | Housing height | Existence of switch | Circuit diagram |
|----|-------------|-----------------|----------------|---------------------|-----------------|
| 1 | SCN-1308-2 | 8 Pins | 2.55 mm | Without | |
| 2 | SCN-1608AU | 8 Pins | 2.20 mm | With | Normally open |

Typical Specifications

| Typical Specifications | | | | | | | |
|------------------------|--------------------------------|-------------------------|-------------------------|--|--|--|--|
| Items | SCN-1308-2 | SCN-1608AU | | | | | |
| Tooms | 5011 1000 2 | Contact part | Switch part | | | | |
| Applicable card | ISO-7816 | ISO-7816 | | | | | |
| Rating | Rating 0.01 mA to 1 A 5 V DC | | 0.1 to 10 mA 5 V DC | | | | |
| Contact resistance | Contact resistance 40 milliohm | | 1 ohm | | | | |
| Insulation resistance | 100 megohm min. 250 V DC | 50 megohm min. 100 V DC | 50 megohm min. 100 V DC | | | | |
| Withstanding voltage | 250 V AC for 1 min. | 100 V AC for 1 min. | 100 V AC for 1 min. | | | | |
| Life | Life 500,000 cycles | | 300,000 cycles | | | | |

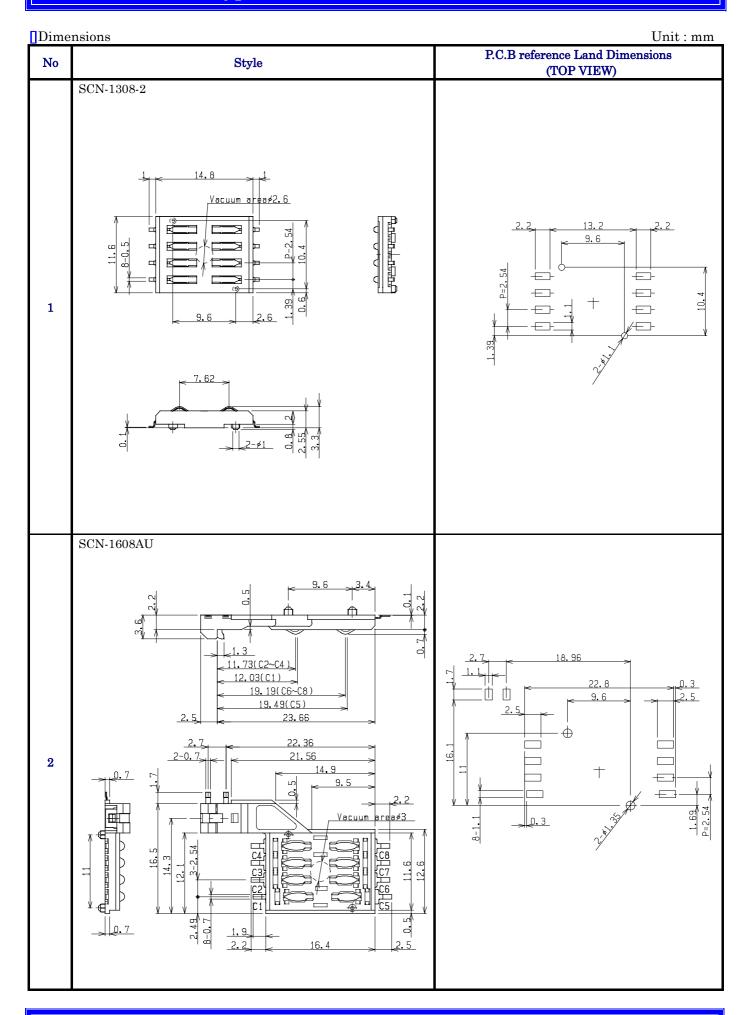

Notes

- 1. The appearance and specifications of the product may be modified without prior notice to improve its performance.
- 2. This catalog shows only outline specifications. When using the product, please obtain formal specifications.
- 3. Please see exhibit [Cautions in Using Connectors].
- 4. Note that if the load is applied to the terminals during soldering, they might suffer deformation and defects in electrical performance.
- 5. Use of water-soluble soldering flux shall be avoided because it may cause corrosion of the switch.
- 6. Care shall be taken not to attach flux on plastic portion.
- 7. This connector is not washable.
- 8. Please confirm the performance on actual operation by simulation with actual environment environments for high reliability.