1/2

Features

- Connection of various cartridge or media.
- →High reliability by gold plated or clad contact.

Applications

Printers, audiovisual products, etc.








Products Line , Typical Specifications

1 Toddets Line, Typical Specifications				0		
No	Products No.	No. of contacts	Fixing method	Max rating (Resistive load)	Contact resistance	Electrical life
1	SCN-1503	3	Snap in	100 mA 5 V DC	1 ohm	10,000 cycles
2	SCN-1503-1	3	P C B mounting	100 mA 5 V DC	1 ohm	500 cycles
3	SCN-1903	3	Snap in	$100~\mathrm{mA}~5~\mathrm{V}~\mathrm{DC}$	1 ohm	900,000 cycles
4	SCN-2002	2	P C B mounting	100 mA 5 V DC	1 ohm	5,000 cycles

Unit: mm Dimensions P.C.B mounting hole Dimensions No Style (TOP VIEW) SCN-1503 16.85 1 SCN-1503-1 3.4 3-1.6X0.8 2

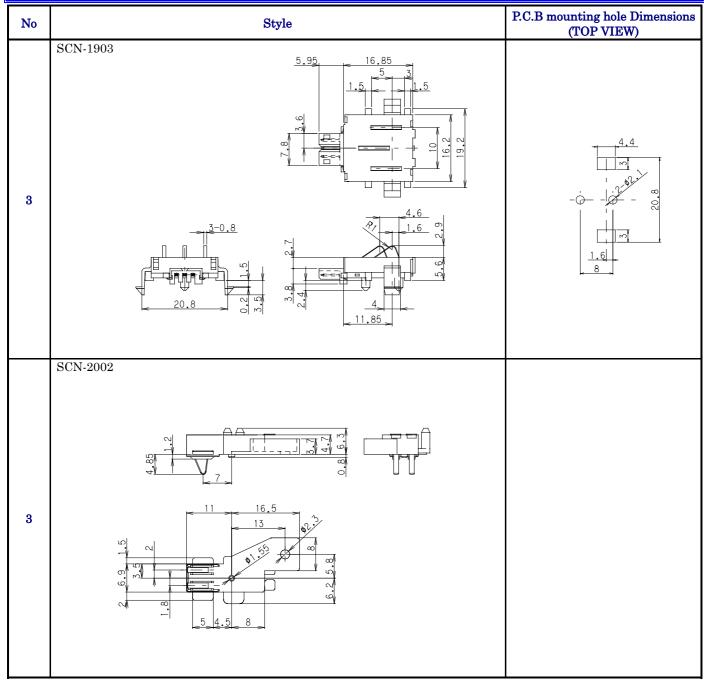

DXF data is not exhibited as products are all custom-made

Notes

- 1. The appearance and specifications of the product may be modified without prior notice to improve its performance.
- 2. This catalog shows only outline specifications. When using the product, please obtain formal specifications.
- 3. Please see appendix [Cautions in Using Connectors].
- 4. This connector is not washable.
- 5. In manual soldering, consideration should be given to apply the soldering iron to the tip of the terminal so that unusual pressure is not applied to the terminal.
- 6. Please do not apply pressure for 1 minute after soldering.
- 7. Care shall be taken not to attach flux on the terminal portion.