

ZISA W180

ACCESS POINTS

Ultra-fast 1.2Gbps Dual-Band 802.11ac AP



Ultra-fast W180 802.11ac AP offer the highest performance in high-density environments and it is a Dual-band 2x2 indoor AP, for ceiling and wall mounting.

Operating at 1.2 Gbps in the 5-GHz band and 600 Mbps in the 2.4-GHz band, these three-stream APs are up to three-times faster than 802.11n APs.

The W180 have four integrated omni-directional downtilt antennas with 2x2 MIMO, Support 16 SSIDs per band and up to 200 simultaneous connections client, FAT/FIT/Cloud modes.

HARWARE SPECTIONS

INTERFACES

One 10/100/1000BASE-T Ethernet network interfaces (RJ-45)

Auto-sensing link speed and MDI/MDX

PoE-PD: 48 Vdc 802.3af PoE or 802.3at PoE+

DC power interface, accepts 1.7/4.0mm center-positive circular plug with 9.5 mm length

USB 2.0 port (Type A connector)

Serial console interface (RJ-45, TTL levels)

Visual indicators (LEDs):

Power/system status

Ethernet link status

Radio status (2x; RAD0, RAD1)

Kensington security slot

Reset button

Chipset: QCA9557 + QCA9882

128MB Nand flash + 128MB DDR2

WIRELESS RADIO SPECIFICATIONS

POWER

Worst-case power consumption from the AP (excluding power drawn by an attached USB device):

In restricted mode (PoE): 13.5 watts

In unrestricted mode (PoE): 17 watts

In unrestricted mode (DC): 15.5 watts

Direct DC source: 12 VDC 1A nominal, +/- 5%

Power over Ethernet (PoE): 48 Vdc (nominal) 802.3af or 802.3at-compliant source

Efficient mode PoE – power save with 802.3af PoE and limited functionality on 2.4 GHz

USB port disabled

2.4-GHz 802.11n radio in 1x3:1SS mode

Unrestricted functionality with 802.3at PoE+

ANTENNAS

Six integrated down-tilt omni-directional antennas for 2x2 MIMO with maximum antenna gain of 3.5 dBi in 2.4 GHz and 4.5 dBi in 5 GHz. Built-in antennas are optimized for horizontal ceiling mounted orientation of W180.

MOUNTING

Included with AP:

Mounting brackets (2) for attaching to 9/16-inch or 15/16-inch T-bar drop-tile ceiling

MECHANICAL

Dimensions/weight (unit, excluding mount accessories):

160 mm (W) x 160 mm (D) x 40 mm (H), 6.2" (W) x 6.2" (D) x 1.6" (H)

450 g/16.2 oz

Dimensions/weight (shipping):

290 mm (W) x 245 mm (D) x 90 mm (H), 11.3" (W) x 9.6" (D) x 3.5" (H)

1,000 g/35 oz

ENVIRONMENTAL

Operating:

Temperature: 0° C to +50° C (+32° F to +122° F)

Humidity: 5% to 95% non-condensing

Storage and transportation temperature range:

Temperature: -40° C to +70° C (-40° F to +158° F)

REGULATORY

FCC

CE Marked

R&TTE Directive 1999/5/EC

Low Voltage Directive 2006/95/EC

EN 300 328

EN 301 489

EN 301 893

UL/IEC/EN 60950



EN 60601-1-1, EN60601-1-2

For more country-specific regulatory information and approvals, please see your ZISA representative.



ANTENNA PATTERN PLOTS

ANTENNA PATTERN PLOTS

Horizontal or Azimuth plane (top view)

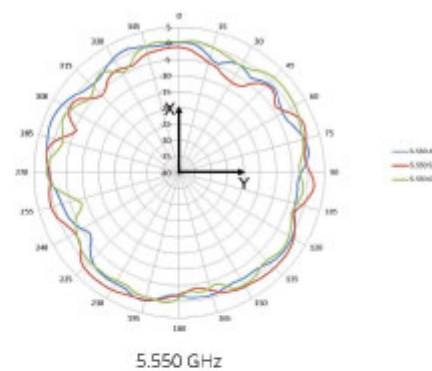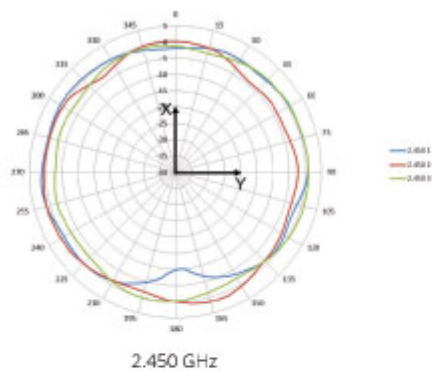

Elevation plane (side view)

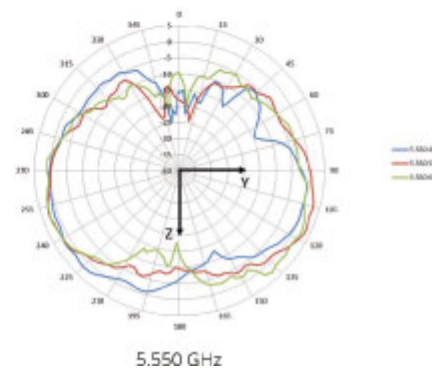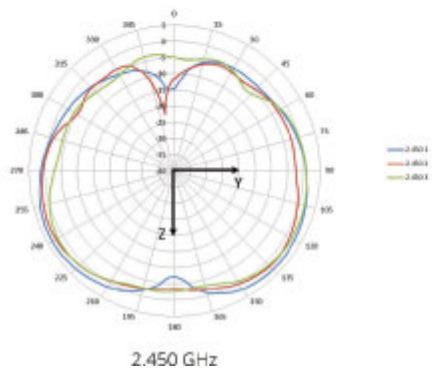

RF PERFORMANCE TABLE

RF PERFORMANCE TABLE		
	Maximum transmit power (dBm) per transmit chain	
802.11b 2.4 GHz		
1 Mbps	18.0	
2 Mbps	18.0	
5.5 Mbps	18.0	
11 Mbps	18.0	
802.11g 2.4 GHz and 802.11a 5 GHz		
6 Mbps	18.0	
54 Mbps	16.0	
802.11n HT20 2.4 GHz and 5 GHz		
MCS0/8	18.0	
MCS7/15	14.5	
802.11n HT40 2.4 GHz and 5 GHz		
MCS0/8	18.0	
MCS7/15	14.5	
802.11ac VHT20 5 GHz		
MCS0	18.0	
MCS9	12.5	
802.11ac VHT40 5 GHz		
MCS0	18.0	
MCS9	12.5	
802.11ac VHT80 5 GHz		
MCS0	18.0	
MCS9	12.5	

Maximum capability of the hardware provided. Maximum transmit power is limited by local regulatory settings.

ZISA Corporation Limited

Tel: +86-10-52885062 Fax: +86-10-58236899

Mail to : sales@zisacom.com.cn

URL: <http://www.zisacom.com.cn>

Specifications are subject to change without notice.

Copyright © ZISA Corp. All rights reserved.

