

TORISATT



Add: 211RM, 6XingYeSan RD, NingBo Free Trade Zone
 www.torisatt.com Skype: woodchen_nb
 E-mail: woodchen_nb@163.com woodchen@torisatt.com
 Cell Phone: 0086, 18989328178 Tel: 0086, 0574-83030229



This catalogue is used to describe our products and their accessories. The information obtained in it does not imply any certified properties or indicate any usability for certain assumed purposes. Technical changes are reserved without prior announcement. We disclaim any liability arising from the illustrations and information in this catalogue and from its unrepresentativeness.



TORISATT

宁波保税区属具机械有限公司
 Ningbo Free Trade Zone Attachments Machinery CO., LTD

TA15 ~ 20 ~ 30 ~ 35 ~ 45 EARTH DRILL

TA50 ~ 55 ~ 60 ~ 75 EARTH DRILL



High Quality and Heavy Duty Made In China
Fitted with EATON motor

High Quality and Heavy Duty Made In China
Fitted with EATON motor



T4 Auger

Model	TA15	TA20	TA30	TA35	TA45
Reference Output Speed Rang (rpm)	42~94	37~91	37~85	31~72	25~61
Reference Output Torque Rang (N.m)	782~1267	963~1559	1174~1900	1357~2388	1836~2710
Mini Excavator Weight (Tone)	1.0~2.5	1.5~2.5	2~3.5	2.5~4.5	3.0~5.0
Gearbox Type	Planetary One Stage				
Oil Flow Rang (l/min)	30~75				
Oil Pressure Rang (bar)	70~170				120~220
STD Output Shaft (mm)	Ø 65 Round				
Optional Output Shaft (mm)	57 × 57 Square				
Optional Output Shaft (mm)	51 Hex				
Auger Diameter Rang (mm)	100~400	100~550	200~600	200~750	200~900
Drilling Depth (m)	1.2				
Optional Extensions Rang (mm)	300/600/900/1200/1500/1800				
Auger Type	T4				
Hitch Options	Double Pin / Cradle				
Unit Diameter (mm)	Ø270				
Unit Height (mm)	772				
Unit Weight (kg)	83	84	85	85	86



T4 Extension



T5 Auger



T5 Telescopic

Model	TA50	TA55	TA60	TA75
Reference Output Speed Rang (rpm)	25~55	22~45	37~95	43~85
Reference Output Torque Rang (N.m)	2017~3266	2511~3707	1944~2572	2491~3295
Mini Excavator Weight (Tone)	4.5~6.0	5~7	6~8	7~9
Gearbox Type	Planetary One Stage			
Oil Flow Rang (l/min)	30~75		55~95	
Oil Pressure Rang (bar)	120~220		150~240	
STD Output Shaft (mm)	75 × 75 Square			
Optional Output Shaft (mm)	64 Hex			
Auger Diameter Rang (mm)	150~700	200~800	300~900	300~1200
STD Auger Drilling Depth (m)	1.5			
Optional Extensions Rang (mm)	1000/1500/2000/2500/3000/3500/4000			
Optional Telescopic Rang (mm)	1500/2000			
Auger Type	T5			
Hitch Options	Double Pin / Cradle			
Unit Diameter (mm)	Ø298			
Unit Height (mm)	894		954	
Unit Weight (kg)	134	135	156	157



T4 Extension

TA80 ~ 90 ~100 EARTH DRILL



TA125 ~ 160 ~ 200~ 240 EARTH DRILL



High Quality and Heavy Duty Made In China
Fitted with EATON motor



T6 Auger



T6 Telescopic

Model	TA80	TA90	TA100
Reference Output Speed Rang (rpm)	21~39	19~39	12~22
Reference Output Torque Rang (N.m)	5346~7071	6318~8357	7776~10285
Mini Excavator Weight (Tone)	7~9/Backhoe	8~11/Backhoe	9~13/Backhoe
Gearbox Type	Planetary Two Stage		
Oil Flow Rang (l/min)	50~95	55~110	55~110
Oil Pressure Rang (bar)	170~240		
STD Output Shaft (mm)	75 × 75 Square		
Optional Control Valve	Pressure Relief Valve / 2 Way Valve		
Auger Diameter Rang (mm)	350~1500		
STD Auger Drilling Depth (m)	1.8		
Optional Extensions Rang (mm)	1500/2000/2500/3000/3500/4000		
Optional Telescopic Rang (mm)	1500/2000		
Auger Type	T6		
Hitch Options	Double Pin / Cradle		
Unit Diameter (mm)	Ø380		
Unit Height (mm)	1159		
Unit Weight (kg)	256	257	258

High Quality and Heavy Duty Made In China
Fitted with EATON motor



T6 Extension



T6 Auger




T6 Telescopic


Model	TA125	TA160	TA200	TA240
Reference Output Speed Rang (rpm)	19~35	15~28	12~22	5~16
Reference Output Torque Rang (N.m)	9478~12535	11908~15749	15067~19927	19019~24007
Mini Excavator Weight (Tone)	10~13	12~17	16~22	17~25
Gearbox Type	Planetary Two Stage			
Oil Flow Rang (l/min)	80~150			
Oil Pressure Rang (bar)	170~240			
STD Output Shaft (mm)	75 × 75 Square			
Optional Control Valve	Pressure Relief Valve / 2 Way Valve			
Auger Diameter Rang (mm)	350~1500			
STD Auger Drilling Depth (m)	1.8			
Optional Extensions Rang (mm)	1500/2000/2500/3000/3500/4000			
Optional Telescopic Rang (mm)	1500/2000			
Auger Type	T6			
Hitch Options	Double Pin / Cradle			
Unit Diameter (mm)	Ø380			
Unit Height (mm)	1199			
Unit Weight (kg)	277	278	279	280



T6 Extension

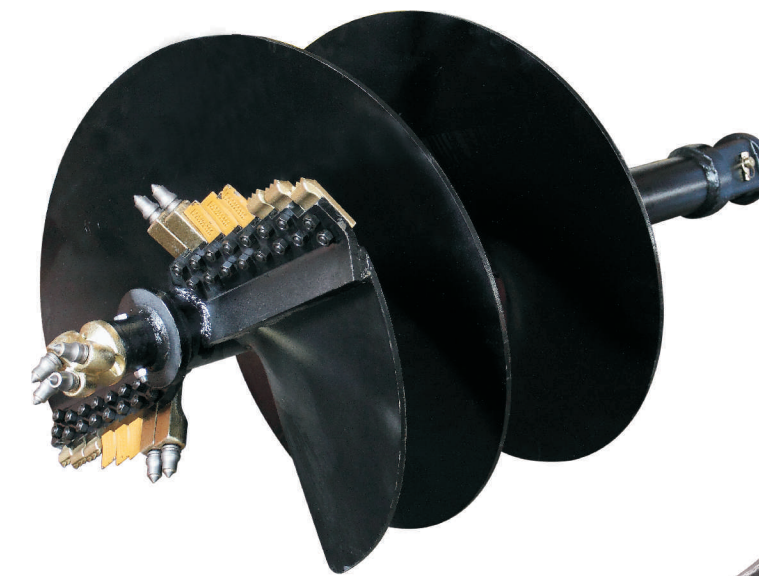

Exchangable Muilt-Founctional Auger

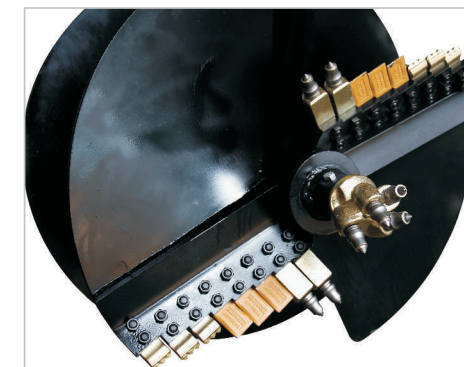


Exchangable Muilt-Founctional Pilot & Bits



Cross Link




Pin & Lock Latch

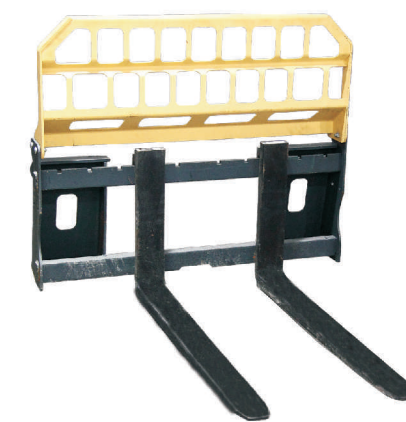


1-2Ton Fok Lift For Skid Steer Loader




Alloy Pilot




Tungsten Pilot



Rock Pilot

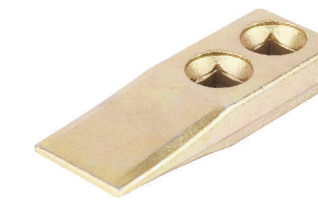

Alloy Bits
(General Soil)

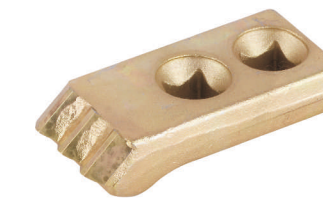

Tungsten Bits
(Sandy, Rooty, Frozen And Soft Rock Soil)



Rock Bits
(Rock, Conceret & Pitch Road Surface)